




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : H04N 5/46, 5/44		A1	(11) International Publication Number: WO 00/64151
			(43) International Publication Date: 26 October 2000 (26.10.00)
(21) International Application Number: PCT/US00/10724		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 20 April 2000 (20.04.00)			
(30) Priority Data: 60/130,167 20 April 1999 (20.04.99) US			
(71) Applicant (for all designated States except US): THOMSON LICENSING S.A. [FR/FR]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR).			
(72) Inventors; and (75) Inventors/Applicants (for US only): GRUBBS, Gary, Dean [US/US]; 8554 Douglaston Court, Indianapolis, IN 46234-7023 (US). HARO, Ricardo [MX/US]; 8760 Rhone Terrace #2A, Indianapolis, IN 46250-3053 (US). DIEMER, Rodger, Anthony [US/US]; 6146 Evanston Avenue, Indianapolis, IN 46220-2318 (US). HUTCHINSON, Daniel, Mark [US/US]; 13790 Laredo Drive, Carmel, IN 46032-5257 (US).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(74) Agents: TRIPOLI, Joseph, S. et al.; Thomson Multimedia Licensing Inc., P.O. Box 5312, 2 Independence Way, Princeton, NJ 08540 (US).			

(54) Title: IF SIGNAL PROCESSING APPARATUS

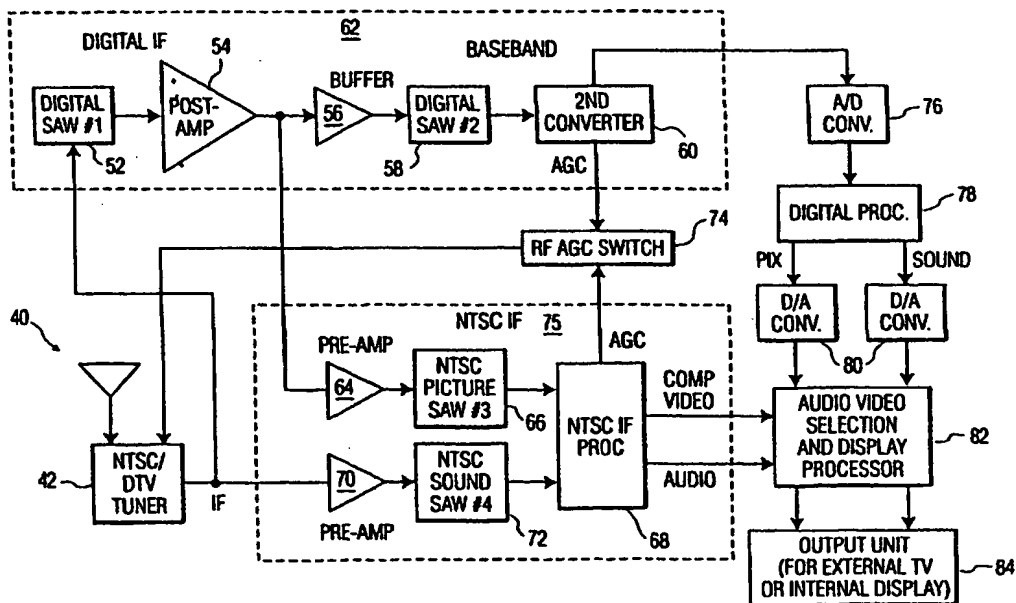

## (57) Abstract

An IF signal processing arrangement for processing both analog and digital signals is disclosed in the present application. The signal processing arrangement includes a signal source for providing one of digital and analog IF signals, a first SAW filter having an output for filtering the IF signal, digital signal processing circuitry coupled to the output for processing a filtered digital IF signal, and analog signal processing circuitry coupled to the output for processing which includes filtering a filtered analog signal.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

IF SIGNAL PROCESSING APPARATUS

5

FIELD OF THE INVENTION

This application relates to intermediate frequency (IF) signal processing.

10

BACKGROUND INFORMATION

FIGURE 1 is exemplary of a known tuner and IF signal processing apparatus indicated generally by the reference numeral 10. This tuner and IF signal processing apparatus 15 10 is for use with analog signals of a given broadcast standard, such as NTSC, PAL, and SECAM. This application describes NTSC application of the invention as an exemplary embodiment.

20

The Tuner/IF system 10 comprises a tuner 12 (with RF input 14 and IF output 16), IF filter(s) 18, and IF signal processor 20. The tuner's IF output 16 is at the standard frequency (e.g., desired channel spectrum centered at 44 MHz, picture carrier at 45.75 MHz, and sound carrier at 25 41.25 MHz). The IF filter(s) 18, which usually consist of one SAW (surface acoustic wave) filter for inter-carrier IF systems or two SAWF for parallel picture and sound IF systems, pass the desired channel and reject all others. In the parallel system one SAW filter passes the desired sound 30 signal only, and the other passes the desired picture signal only. In either case, the filter characteristics include a "Nyquist Slope" through the double-side-band region of the picture IF spectrum. The filtered signal is applied to a conventional IF processing circuit 20 which performs such 35 general functions as demodulation, AGC generation and the like and provides a processed baseband video output signal to a video processing circuit. The video processing circuit performs conventional functions such as color demodulation

and other functions such as brightness, hue and tint control and the like.

5 With the advent of digital television (DTV), and specifically digital terrestrial television such as HDTV (high definition television), television receivers and their corresponding tuner/IF systems which provide proper tuning and filtering required for processing both NTSC and DTV signals are needed.

10

FIGURE 2 illustrates a modification of the NTSC only system of FIGURE 1 to provide a tuner/IF system 22 able to be used for both NTSC and DTV reception. In FIGURE 2, a tuner 24 is modified to provide reception of both NTSC and DTV signals. Conversion signals are appropriately selected such that both types of signals produce a common IF signal frequency (e.g., about 44 MHz). Two SAW filters 26 and 28 are coupled in parallel with the output of the NTSC/DTV tuner. SAW BPF #1 26 has specific requirements for DTV signal reception and processing while SAW BPF #2 28 has specific requirements for NTSC signal reception and processing. For example, both SAW BPF #1 26 and SAW BPF #2 28 have a center frequency of about 44 MHz. However, SAW BPF #1 has a flat passband response, while SAW BPF #2 has the characteristics described above for the IF Filter(s) 18 in figure 1. The DTV filtered signal is applied to Digital IF processing circuitry 30. The digital IF processing circuitry 30 provides the filtered and processed DTV signal to Digital Link (i.e., decoder) circuitry (not shown). The NTSC filtered signal is applied to NTSC IF processing circuitry 32. The NTSC IF processing circuitry 32 provides the filtered and processed NTSC signal to video processing circuitry (not shown).

35 Due to passband flatness requirements for DTV signals, the DTV/NTSC tuner 24 in FIGURE 2 has a wider bandwidth than the NTSC tuner 12 in FIGURE 1. Consequently, the NTSC adjacent channel rejection of system 22 in FIGURE 2 is not as good as system 10 in FIGURE 1.

### SUMMARY

5       An If signal processing arrangement for processing both analog and digital signals is disclosed in the present application. The signal processing arrangement includes a signal source for providing one of digital and analog IF signals, a first SAW filter having an output for filtering  
10 the IF signal, digital signal processing circuitry coupled to the output for processing a filtered digital IF signal, and analog signal processing circuitry coupled to the output for processing which includes filtering a filtered analog signal.

15

### BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated in the accompanying drawings, wherein:

20

FIGURE 1 (Prior Art) is a block diagram of a conventional NTSC Tuner/IF configuration for processing NTSC television signals;

25       FIGURE 2 is a block diagram of a parallel DTV/NTSC Tuner/IF configuration for tuning both DTV and NTSC signals;

FIGURE 3 is a simplified block diagram of a dual DTV/NTSC Tuner/IF apparatus embodying the features of the  
30 present invention;

FIGURE 4 is a detailed block diagram illustrating a practical implementation and additional features of the embodiment of FIGURE 3;

35

FIGURE 5 is a tuner frequency response diagram comparing the response of a conventional NTSC only tuner with that of the embodiments of FIGURES 3 and 4;

40       FIGURE 6 is a tuner frequency response diagram comparing the selectivity of a conventional NTSC only

receiver to that of the embodiments of FIGURES 3 and 4 of the present invention; and

FIGURE 7 is a tuner frequency response diagram illustrating certain aspects of sound intermediate frequency (SIF) processing for the embodiment of FIGURE 4.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

10 The present invention recognizes that passing the NTSC signal through SAW BPF #1 (i.e., connecting the input of SAW BPF #2 to the output of SAW BPF #1 instead of the tuner output) provides dramatically better adjacent channel and spurious signal rejection than system 10 in FIGURE 1. This change is illustrated in FIGURE 3. These benefits are significant as NTSC adjacent channel rejection (1st adjacent, 2nd adjacent, etc.) is a parameter that becomes significantly more important during the HDTV transition period in which VHF and UHF "taboos" (i.e., restrictions) on adjacent channel frequency allocations may be discarded or significantly reduced to make more spectral room available for the new HDTV terrestrial transmission channels while still accommodating current NTSC terrestrial channel allocations.

25 A simplified diagram of the NTSC/DTV tuner/IF signal processor of the present invention is illustrated in FIGURE 3 and indicated generally by the reference numeral 40. A more detailed diagram illustrating further features of the tuner/IF signal processor 40 of the present invention is shown in FIGURE 4. FIGURES 3 and 4 show that the input to the NTSC SAW filter is taken from the output of a DTV SAW filter. Thus, the received NTSC signal is "double filtered".

35 Advantageously, the configurations of FIGURES 3 and 4 provide significant improvement in NTSC adjacent channel rejection and rejection of other out-of-band undesired signals as compared with the examples of FIGURES 1 and 2.

In FIGURE 3, the NTSC/DTV tuner/IF signal processor 40 is provided with conversion frequencies which result in a common IF output signal frequency (e.g., 44 MHz) for both NTSC and DTV reception modes. The NTSC/DTV tuner/IF signal processor 40 includes a single conversion tuner 42 able to receive both NTSC and DTV signals. The tuner 42 provides received NTSC and DTV signals to a first SAW filter 44. The output of the first SAW filter 44 is provided to both a second SAW filter 46 and digital IF processing circuitry 48. The digital IF processing circuitry 48 receives the filtered signal from the first SAW filter 44 and provides a near baseband output signal to digital "link" or decoder circuitry (see Figure 4).

When an NTSC signal is received, the received signal is provided to the first SAW filter 44. The first SAW filter 44 filters the received NTSC signal and provides the filtered signal to the second SAW filter 46. The IF signal thus passes through both filters for application to the NTSC IF processing circuitry 50 thereby reducing the undesirable effects of adjacent channel interference discussed above.

FIGURE 4 is a practical implementation of figure 3, and includes more details. With the current state-of-the-art technology, the filter characteristics required for the DTV IF signal cannot be achieved with a single SAW filter as depicted by SAW BPF #1 44 in figure 3. That is, the selectivity requirements cannot be met without excessive insertion loss. The excessive insertion loss would ultimately result in inferior system noise figure or severe linearity requirement for a preamplifier. In practice, the required filter and performance characteristics are achieved by cascading two identical SAW filters, Digital SAW #1 and Digital SAW #2, with inter-stage amplifiers Post-amp 54 and Pre-amp 56 as shown in figure 4. Thus, when a DTV signal is selected by the NTSC/DTV tuner 42, it is processed through the cascaded circuits comprised of Digital SAW #1, Post-amp 54, Pre-amp 56, and Digital SAW #2 58, to input of a 2<sup>nd</sup> converter circuit 60.

The Post-amp 54 provides an optimum load impedance for Digital SAW #1 44 and compensates for its loss. Similarly, the Pre-amp 56 provides an optimum source impedance for Digital SAW #2 58 and compensates for its loss. The output of the 2<sup>nd</sup> converter circuit 60 is converted from an analog signal to a digital signal by the A/D Converter 76, the digital processor 78 demodulates the digital signal and separates the picture and sound signals, and the signals are converted back to analog format by a pair of digital-to-analog converters 80.

When an NTSC signal is selected by the NTSC/DTV tuner 42, there are separate paths for the picture and sound signals. The picture signal is processed through Digital SAW #1 44 and Post-amp 54 before being processed through the Pre-amp 64 and conventional NTSC Picture SAW #3 66 to the NTSC processor 68. Since the sound carrier frequency is at the band-edge of Digital SAW #1 44 and the sloped frequency response through the sound channel will have undesirable effects (see figure 7), the sound signal does not pass through Digital SAW #1 and Post-amp 54. Instead the sound signal is processed through Pre-amp 70 and NTSC Sound SAW #4 72 to the NTSC IF processor 68. The Pre-amp 64 provides an optimum source impedance for NTSC Picture SAW #3 66 and compensates for its loss.

Similarly, the Pre-amp 70 provides the optimum source impedance for NTSC Sound SAW #4 and compensates for its loss. Processing the picture signal through Digital SAW #1 44 and Post-amp 54 provides the advantage of better selectivity (e.g., adjacent channel rejection and spurious signal immunity). The NTSC IF processor demodulates the picture and sound signals and provides composite video and audio baseband outputs.

Both the Digital IF 2<sup>nd</sup> Converter 60 and NTSC IF Processor generate RF AGC control signals that are applied to a RF AGC Switch 74. The output of the RF AGC Switch 74

controls the gain of the NTSC/DTV tuner 42. Similarly, the NTSC IF processor 68 and D/A converter 80 picture and sound signals are applied to an Audio-Video Selection and Display Processor 82 whose output drives an internal or external display unit 84. When the system is installed in a new location, an automatic setup procedure determines which type of signal (NTSC or DTV) is present on each channel and stores the results in memory (not shown). Then whenever a new channel is selected, the system microprocessor (not shown) uses the data stored in memory to properly set the RF AGC switch 74 and the Audio-Video Selection Switch 82.

FIGURE 5 compares the frequency response of the NTSC only tuner 12 (figure 1) and the NTSC/DTV tuner 42 (figure 4) of the present invention. The wider bandwidth (i.e., poorer selectivity) of the NTSC/DTV tuner is a negative consequence of being able to maintain the passband flatness requirements for DTV signals.

FIGURE 6 compares the frequency response of the NTSC only tuner 12 (figure 1) to the frequency response through the NTSC/DTV tuner 42, Digital SAW #1 44, and Post-amp 54 (figure 4). Since the frequency response of the subsequent circuits is the same for both systems, this illustrates the huge advantage in passing the NTSC picture IF signal through Digital SAW #1 44 and Post-amp 54 instead of directly to the input of the Pre-amp 64 in the NTSC IF 50. Doing so more than compensates for the relatively poor selectivity of the NTSC/DTV tuner 42. The selectivity of the present invention, as seen in FIGURE 6, is indicative of excellent adjacent channel rejection and spurious signal immunity.

It will be noted that the embodiment of FIGURE 4 has two SAW filters in the DTV signal path, and the NTSC picture signal is only passed through the first of these two SAW filters. This is the preferred configuration because it achieves the selectivity requirements with negligible degradation to system noise figure. That is passing the NTSC picture signal through both SAW filters in the DTV

signal path is not necessary from a selectivity standpoint, and the additional degradation in system noise figure may be significant.

5               FIGURE 7 is a graph illustrating the effects of passing the NTSC sound IF signal through the first SAW filter 44 as opposed to bypassing the first SAW filter 44. The results obtained by passing the NTSC sound signal through the first SAW filter 44 differ drastically from the  
10 results obtained by bypassing the first SAW filter 44. As can be seen from this figure, when the sound IF signal is provided from the single conversion tuner 42 directly to the NTSC sound SAW filter 72, the frequency response through the sound channel is constant. Such is not the case for passing  
15 the NTSC sound IF signal through the first filter 44. It is thus beneficial for the NTSC sound IF signal to bypass the first SAW filter 44.

20               Although the present invention has been described with a certain degree of particularity, it is understood that the present disclosure has been made by way of examples and that changes in details of arrangement may be made without departing from the spirit the invention. For example, the analog television signals may include PAL and SECAM  
25 television signals, and the digital television (DTV) signals may include QAM and digital VSB television signals. In addition, the DTV signal processing after Digital SAW #2 might utilize another approach (e.g., A/D conversion and digital demodulation immediately after Digital SAW #2).

## CLAIMS

We claim:

5

1. A signal processing arrangement comprising:  
a signal source for providing one of digital and  
analog IF signals;  
a first SAW filter having an output for filtering  
10 said IF signal;  
digital signal processing means coupled to said  
output for processing a filtered digital IF signal; and  
analog signal processing means coupled to said  
output for processing which includes filtering a filtered  
15 analog signal.

20

2. The arrangement according to Claim 1, wherein  
said digital signal processing means includes a  
second SAW filter.
3. The arrangement according to Claim 1, wherein  
said analog signal processing means includes a  
third SAW filter.
- 25 4. The arrangement according to Claim 2, wherein  
said analog signal processing means includes a  
third SAW filter.
5. The arrangement according to Claim 4 wherein  
30 said digital signal processing means is being  
decoupled from a subsequent signal processing circuit while  
said analog IF signal is applied thereto.
6. The arrangement according to claim 4 wherein  
35 said analog signal processing means is being  
decoupled from a subsequent signal processing circuit while  
said digital IF signal is applied thereto.
7. The arrangement according to claim 1 wherein  
40 said analog IF signal is an NTSC IF signal.

8. An IF signal processing apparatus comprising:  
a single conversion tuner for receiving IF signals  
having picture and sound signals and including one of analog  
5 and digital content;  
a first SAW filter connected to said single  
conversion tuner for filtering the received IF signals, said  
first SAW filter having an output;  
digital IF circuitry connected to said output of  
10 said first SAW filter for receiving and digitally processing  
the filtered IF signals;  
analog IF circuitry also connected to said output  
of said first SAW filter for receiving and performing analog  
processing of the filtered IF signals, said analog IF  
15 circuitry performing a second filtering operation on the  
filtered IF signal.

9. The apparatus according to Claim 8, wherein  
said digital processing circuitry includes a  
20 second SAW filter for double filtering the filtered IF  
signal.

10. The apparatus according to Claim 8, wherein  
said analog processing circuitry includes a third  
25 SAW filter for double filtering the filtered IF signal.

11. The apparatus according to Claim 9, wherein  
said anaolog processing circuitry includes a third  
SAW filter for performing the second filtering of the  
30 received IF signal.

12. The apparatus according to Claim 11, wherein  
said digital IF circuitry is able to determine  
whether the filtered IF signal includes analog or digital  
35 content, said digital IF circuitry blocking the filtered IF  
signal from passing therethrough upon determining the  
filtered IF signal includes analog content.

13. The apparatus according to Claim 11, wherein

said analog IF circuitry is able to determine whether the filtered IF signal includes analog or digital content, said analog IF circuitry blocking the filtered IF signal from passing therethrough upon determining said  
5 filtered IF signal includes digital content.

14. The apparatus according to Claim 8, wherein  
said digital IF circuitry includes a cascade  
connection of said first digital SAW, a preamplifier, a  
10 buffer amplifier, a second SAW filter and a second  
converter.

15. The apparatus according to Claim 14, wherein  
said analog IF circuitry includes a buffer  
15 amplifier having an input connected to said output of said  
preamplifier, a analog SAW and a analog IF processor for  
producing a composite video signal and an audio signal to be  
provided to said display means.

20 16. The apparatus according to Claim 15, wherein  
said analog IF circuitry further includes a second  
buffer amplifier connected to receive a analog sound signal  
from said single conversion tuner and a analog sound SAW for  
filtering said analog sound signal and providing the  
25 filtered analog sound signal to said analog IF processor.


17. A method of filtering IF signals including one of  
analog and digital content, said method comprising the steps  
of:  
30 receiving the IF signal by a single conversion  
tuner;  
filtering the IF signal in a first SAW filter;  
providing the filtered IF signal to both a digital  
IF circuit and an analog IF circuit;  
35 filtering the filtered IF signal a second time in  
said digital IF circuit; and  
filtering the filtered IF signal a second time in  
said analog IF circuit.

18. The method of Claim 17, further comprising the steps of providing the sound component of said IF signal received by said single conversion tuner to a sound SAW filter.


5

19. The method of Claim 18, wherein said first SAW filter filters the picture component of said IF signal.


10 20. The method of Claim 19, further comprising the step of amplifying the filtered signal prior to providing the filtered signal to both said digital IF circuit and analog IF circuit.

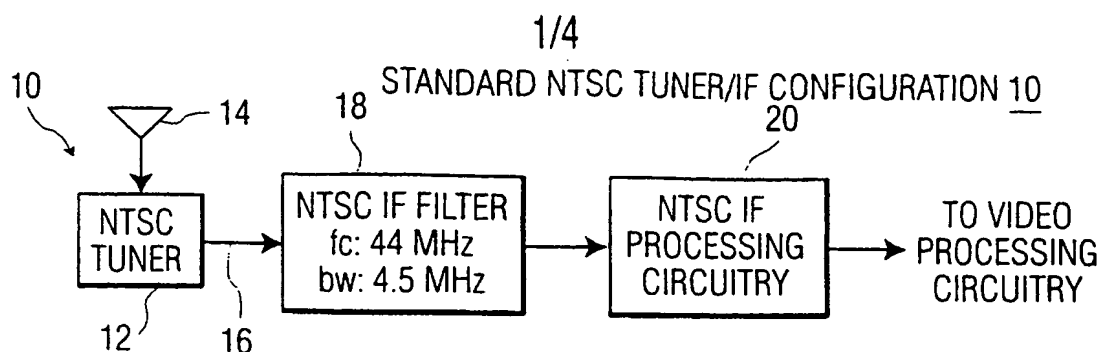

**FIG. 1**  
PRIOR ART

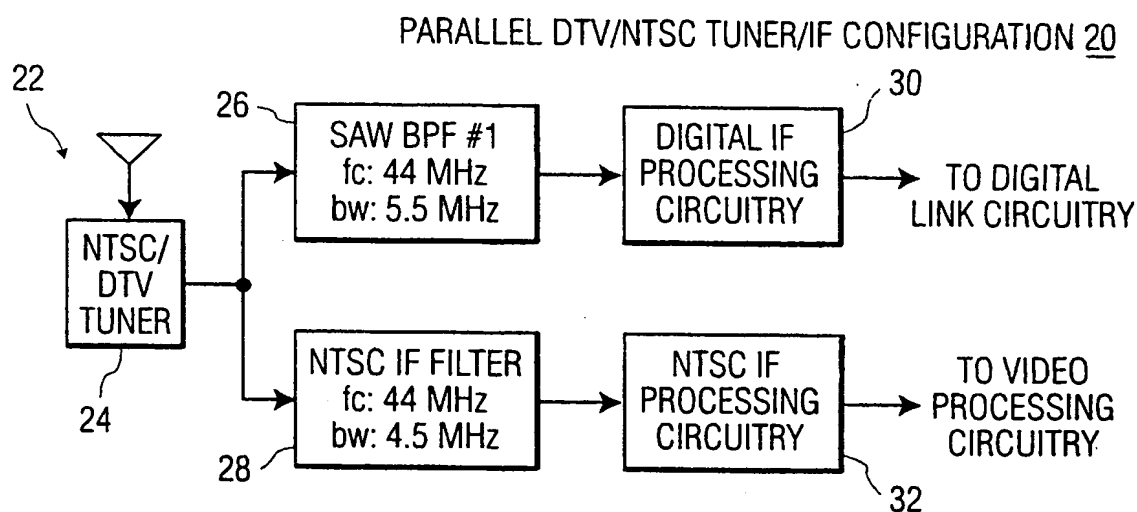

**FIG. 2**

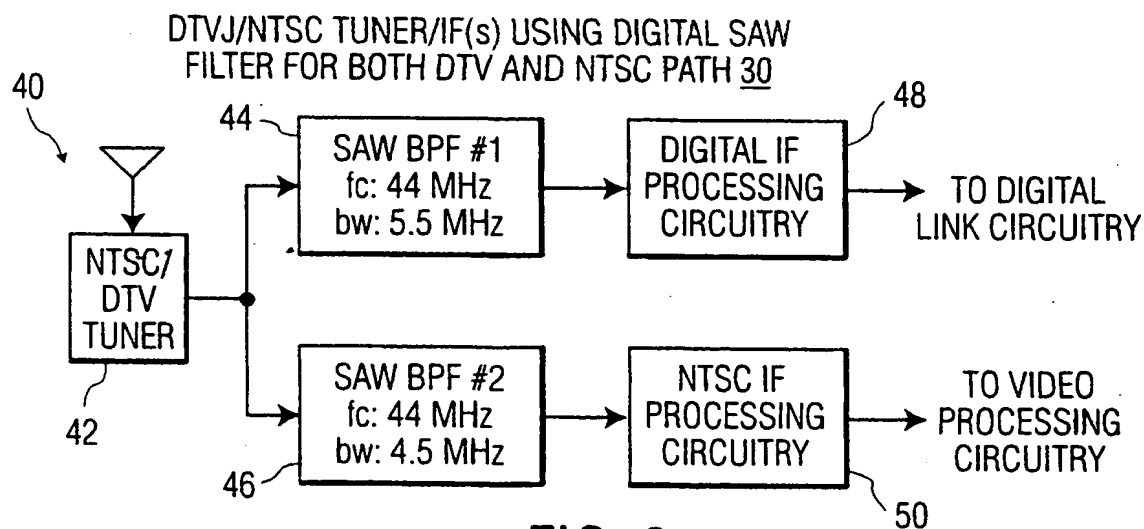

**FIG. 3**

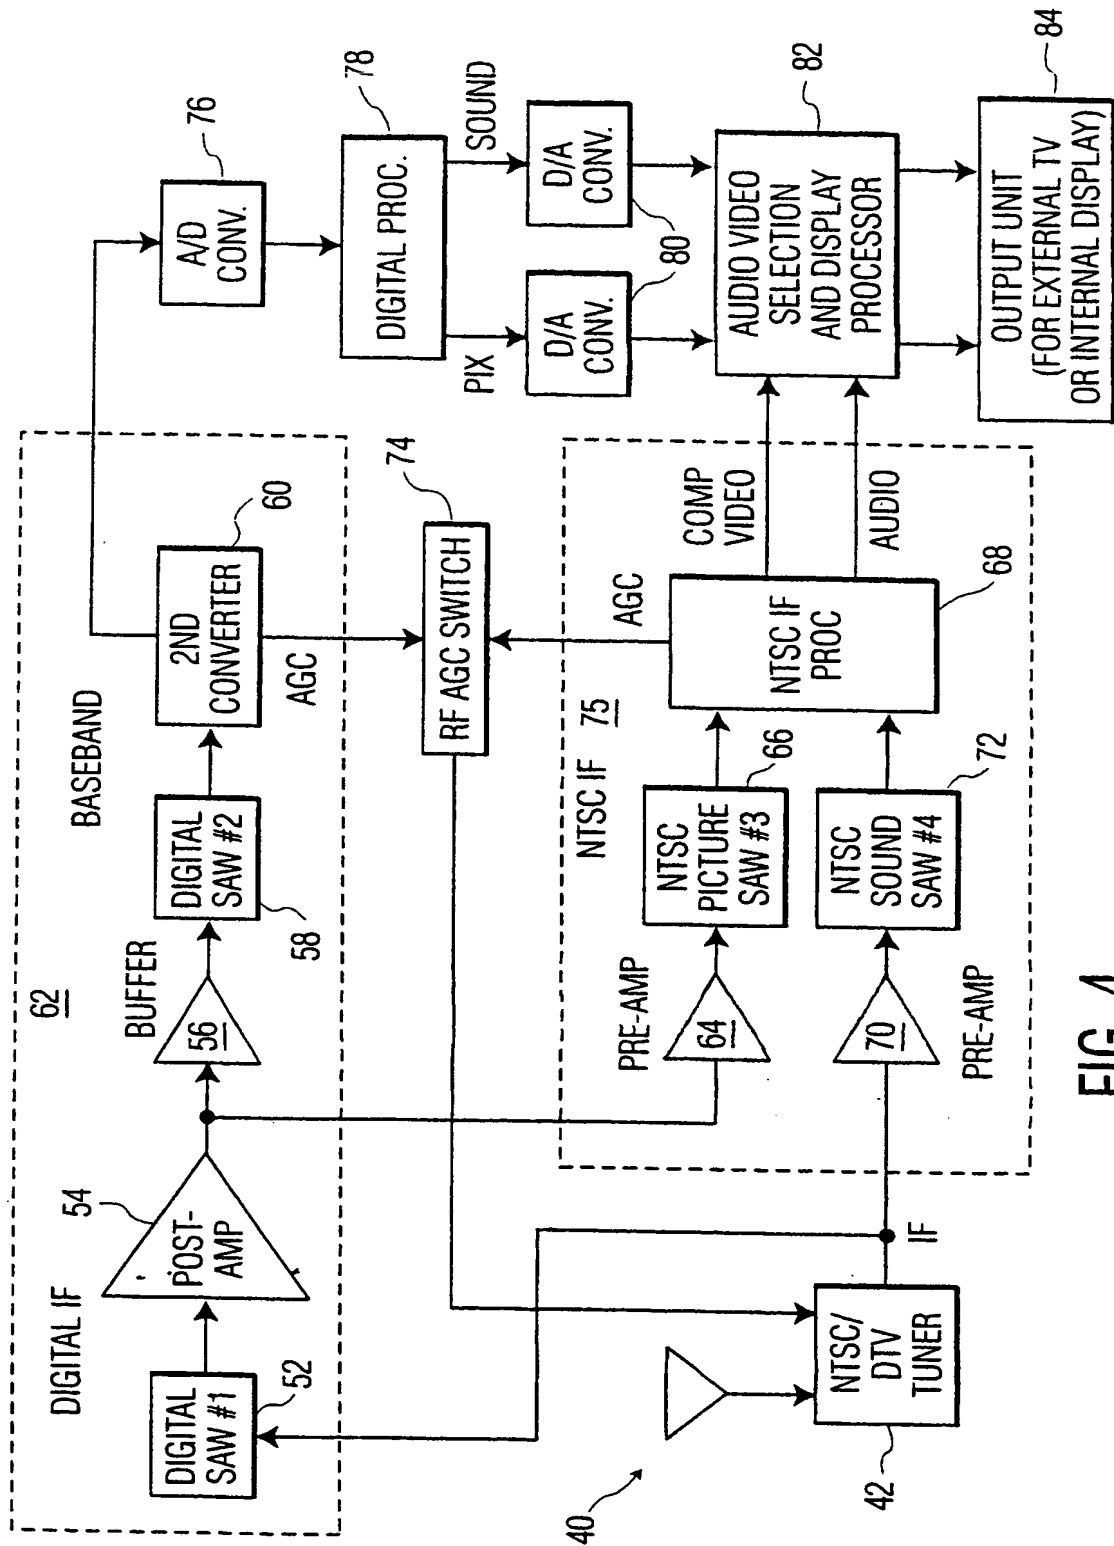


FIG. 4

3/4

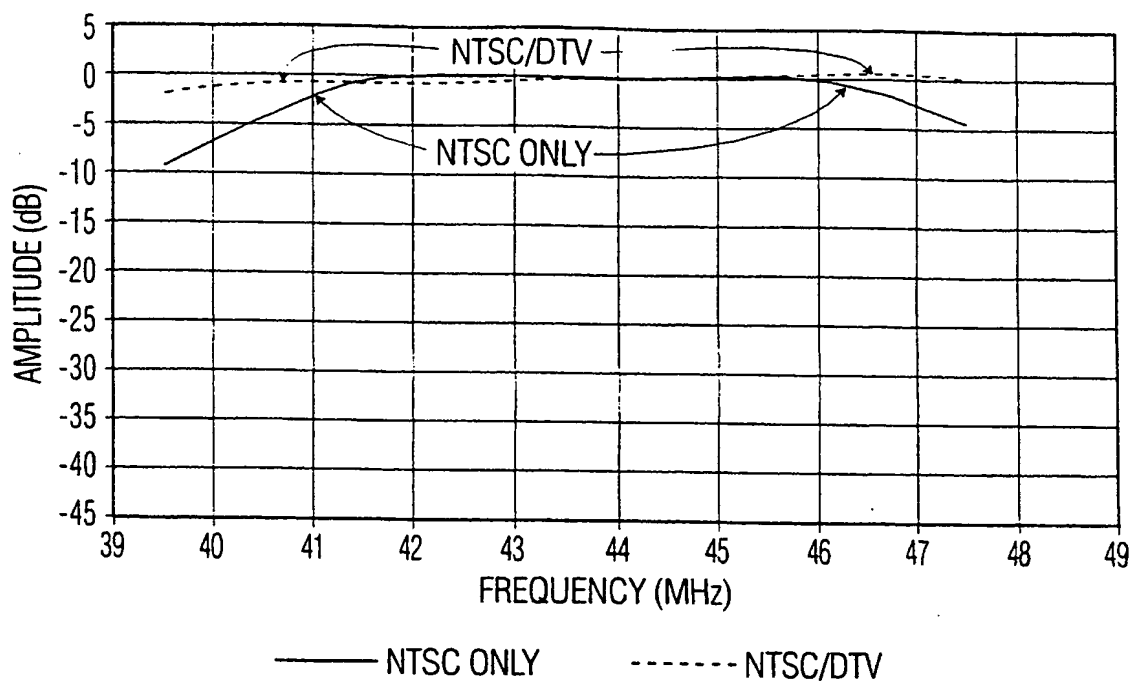


FIG. 5

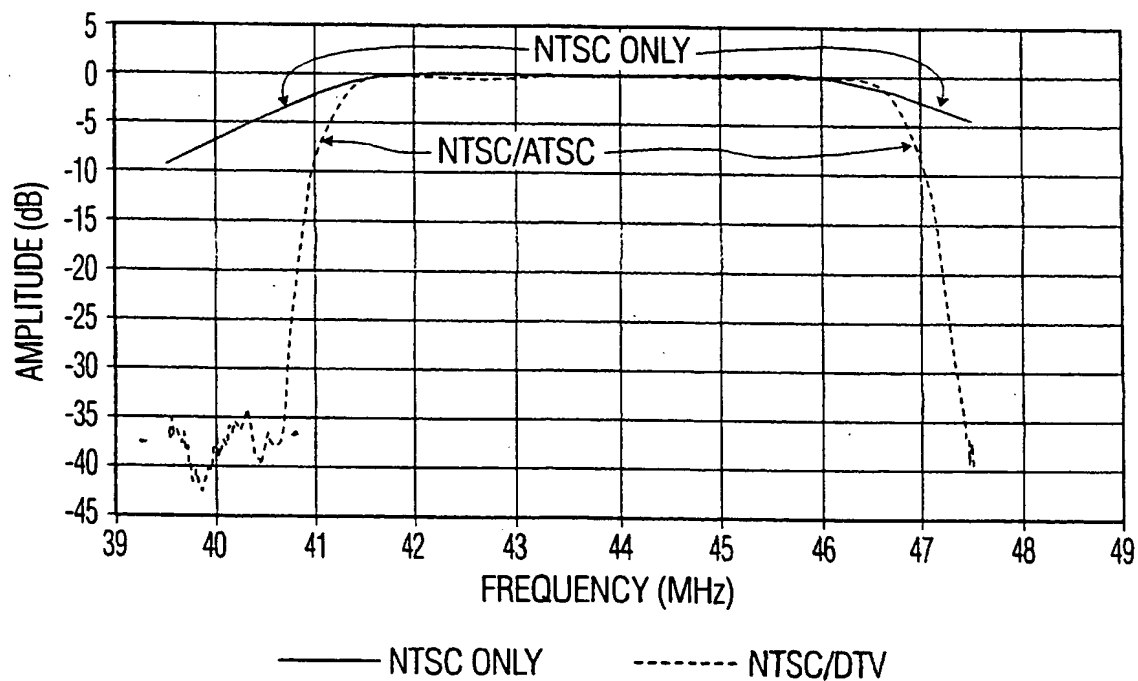


FIG. 6

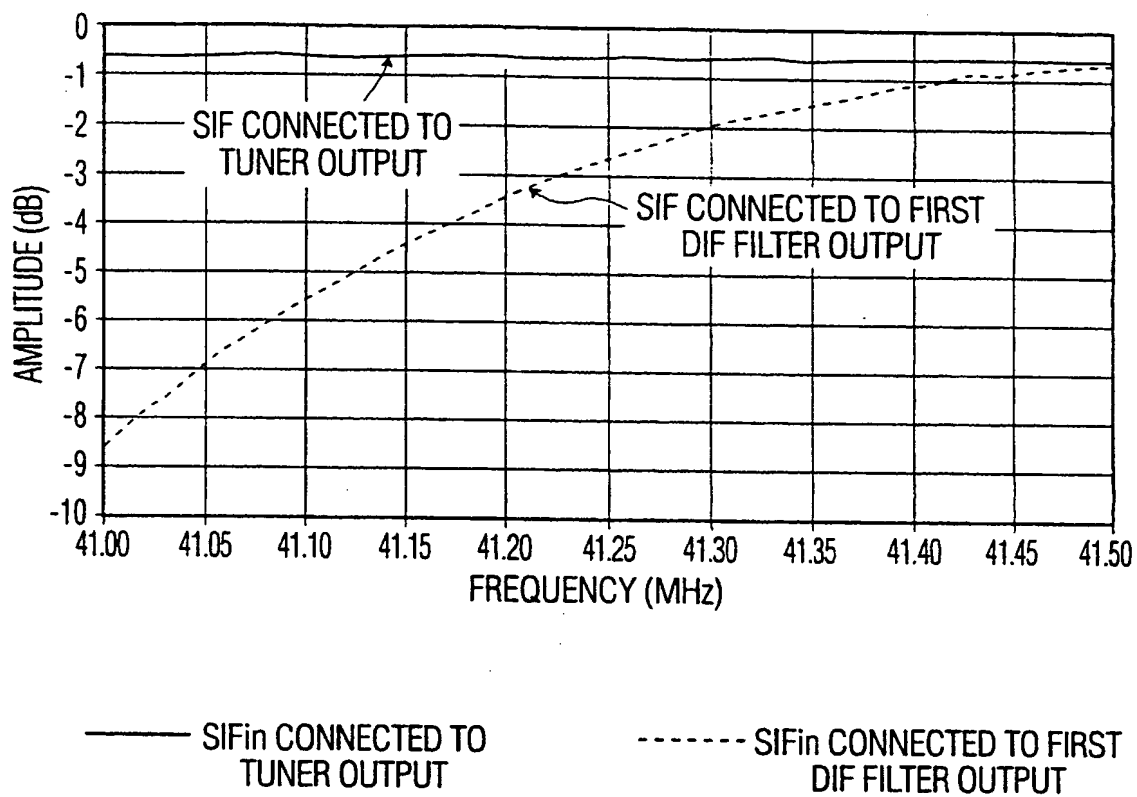


FIG. 7

# INTERNATIONAL SEARCH REPORT

Inte lional Application No

PCT/US 00/10724

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04N5/46 H04N5/44

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 808 060 A (THOMSON BRANDT GMBH) 19 November 1997 (1997-11-19) column 2, line 32 -column 3, line 8; figures 2,4	1,3,7,8, 10
A		5,6, 12-15,17
Y	US 5 283 653 A (CITTA RICHARD W) 1 February 1994 (1994-02-01) abstract	1,3,7,8, 10



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

25 September 2000

Date of mailing of the international search report

04/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Peeters, M

# INTERNATIONAL SEARCH REPORT

Int. J. Application No

PCT/US 00/10724

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0808060	A	19-11-1997	DE 19619750 A	20-11-1997
			CN 1166089 A	26-11-1997
			JP 10084298 A	31-03-1998
US 5283653	A	01-02-1994	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)